



Bobcat®

COMPACT EXCAVATORS

E64



One Tough Animal™

E64 — SPECIFICATIONS

Weights

| | |
|---|-----------|
| Operating weight with ROPS cabin, steel tracks, counterweight, 800 mm bucket (SAE J732) | 6100 kg |
| Ground pressure with steel tracks | 33.90 kPa |

Engine

| | |
|-------------------------------|----------------------------|
| Make / model | Kubota / V2403 |
| Fuel | Diesel |
| Number of cylinders | 4 |
| Displacement | 2433 cm ³ |
| Maximum NET power (ISO 9249) | 48.8 HP |
| Maximum NET torque (ISO 9249) | 179.5 Nm |
| Bucket Capacity | 0.22 - 0.28 m ³ |

Performance

| | |
|----------------------------------|----------|
| Digging force, arm (ISO 6015) | 26100 N |
| Digging force, bucket (ISO 6015) | 42000 N |
| Drawbar pull | 52343 N |
| Travel speed, low range | 3.1 km/h |
| Travel speed, high range | 5.0 km/h |

Hydraulic System

| | |
|------------------|---|
| Pump type | Single outlet variable displacement, load sensing torque limited pump |
| Pump capacity | 138.50 L/min |
| Auxiliary flow | 75.70 L/min |
| Auxiliary relief | 210.0 bar |

Slew System

| | |
|-------------------|----------|
| Boom swing, left | 75° |
| Boom swing, right | 50° |
| Slew rate | 10.0 RPM |

Fluid Capacities

| | |
|------------------------------------|---------|
| Cooling system | 8.30 L |
| Engine lubrication plus oil filter | 7.10 L |
| Fuel reservoir | 79.90 L |
| Hydraulic system | 54.90 L |

Environmental

| | |
|--|----------|
| Noise level LpA(EU Directive 2000/14/EC) | 77 dB(A) |
| Noise level LWA(EU Directive 2000/14/EC) | 97 dB(A) |


Standard Features

| | |
|----------------------|-----------------------|
| 1960 mm dozer blade | Cab light |
| 400 mm steel track | Control console locks |
| Auto idle | Cupholder |
| Auxiliary hydraulics | Work Lights |
| Blade float feature | |

Options


| |
|---------------|
| Rubber tracks |
| AC Cabin |
| Bucket Clamp |

Working Range

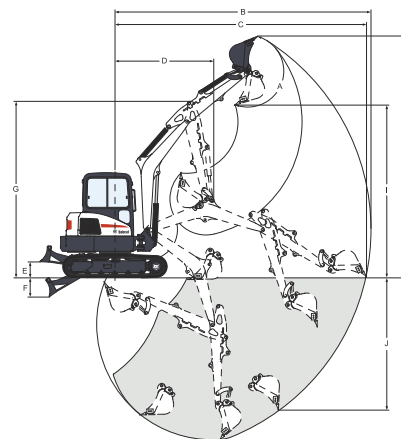

| | |
|---------------|---------------|
| (A) 185° | (G) 4269.0 mm |
| (B) 6191.0 mm | (H) 5850.0 mm |
| (C) 6083.0 mm | (I) 4179.0 mm |
| (D) 2389.0 mm | (J) 3199.0 mm |
| (E) 385.0 mm | (K) 3923.0 mm |
| (F) 465.0 mm | |

Dimensions

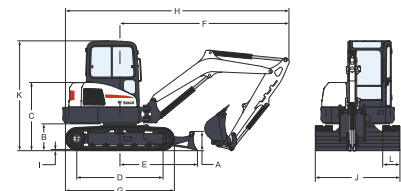

| | |
|---------------|---------------|
| (A) 446.0 mm | (J) 1960.0 mm |
| (B) 618.0 mm | (K) 2541.0 mm |
| (C) 1575.0 mm | (L) 400.0 mm |
| (D) 1998.0 mm | (M) 394.0 mm |
| (E) 1796.0 mm | (N) 631.0 mm |
| (F) 3872.0 mm | (O) 2041.0 mm |
| (G) 3057.0 mm | (P) 1322.0 mm |
| (H) 5194.0 mm | (Q) 2290.0 mm |
| (I) 25.0 mm | (R) 1949.0 mm |



Bobcat®

Doosan Bobcat India Pvt. Ltd.,

6th Floor, HTC Towers, No.41, GST Road, Guindy, Chennai - 600 032, India.

© +91 96000 04852 ✉ bobcatindia@doosan.com